

WINE MASTER

le temps d'être différent

THE MOST BEAUTIFUL WINDOW SHOWCASE

In order to meet the building requirements of glassed-in spaces, WineMaster® is launching a new line of wine cellar air conditioners: SPLIT SP40/80. Whether you are a passionate connoisseur or a restaurant business professional, your wine collection deserves the prettiest window showcases for the enjoyment of all.

WINE CELLAR AIR CONDITIONER



40-80 m³

Air-conditioning up to 80m³



8°C - 18°C

High performance integrated thermostat



Quiet



Respectful of the environment



Ideal climate conditions for the preservation of your wine

* insulation type and thickness has to be in accordance with the volume of the cellar. Glass and thermal losses throughout the room will limit the achievable temperature.

WINE SP40/80 DU PRO

THE DUCTED SPLIT UNITS







WINE SP40/80 DU PRO

- *Keeps cellars at a constant temp. of between 14°-18°
- Humidity control : excess humidity is condensed and evacuated towards the outside
- Rubber shock absorbers are incorporated, creating an anti-vibration system
- Automatic defrost for maximum cooling efficiency
- Washable filter for easy and quick maintenance
- Wired electronic thermostat regulation
- This model must be installed by a professional.
- 2 year guarantee
- This model must be installed by a professionnal.

OUTSIDE UNIT

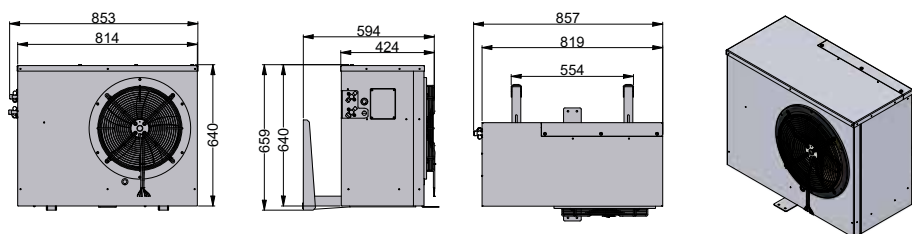

INSIDE UNIT

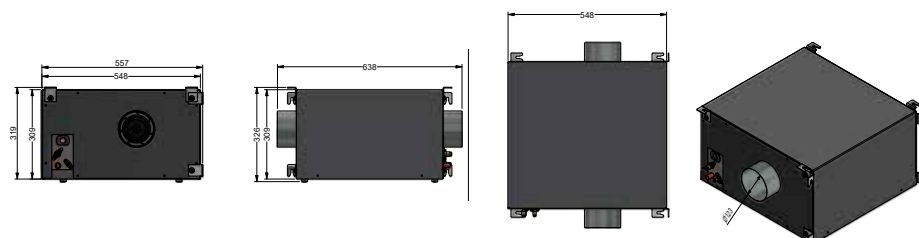


INSTALLATION DIAGRAM

Above



On side

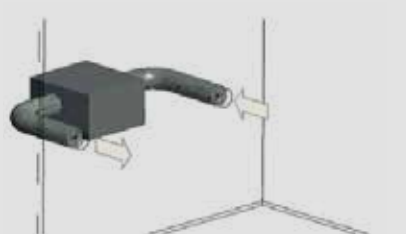



WINE SP40/80 THE NEW GENERATION OF AIR CONDITIONERS FOR WINE CELLARS

The WineMaster® product range was designed to bring optimal air conditioning solutions to the wine cellar of your dreams.

Thanks to constant temperature and humidity preservation, your wines can blossom all year long in a wine cellar under the best conditions, even in the event of extreme outside temperatures (-30°C to +40°C).



REFERENCE	SP40 DU PRO	SP80 DU PRO
Air conditioning capacity*	Up to 40 m ³	Up to 80 m ³
Cooling capacity	900 watt	1600 watt
Heating capacity	500 watt	500 watt

CONDENSATION GROUP (EXTERNAL UNIT)		
Airflow rate	840 m ³ /h	840 m ³ /h
Sound level	42db (1m)	42db (1m)
Weight	55 Kg	env. 65 Kg
Dimensions H x W x D	640X853X424 mm	640 x 853 x 424 mm
Electrical supply	230-240 V - 50Hz	230-240 V - 50Hz
Body color	RAL 7012	RAL 7012
Coolant	R449 A	R1234 yf
Secure pressure switch HP	●	●
Secure pressure switch BP	●	●
Pressure actuated speed controller	●	●
Oil separator	●	●
Check valve	●	●
Waterproof electrical box	●	●
Refrigerant line	1/4" and 3/8"	1/2" and 3/8"
Washable air filter	●	●
Heating belt	●	●

EVAPORATOR (INSIDE UNIT)		
Weight	26 Kg	26 Kg
Dimensions H x W x D	319 x 638 x 548 mm	319 x 638 x 548 mm
Body color	RAL 7012	RAL 7012
Number of speeds	2	2
Diamètre de buse	125 mm	125 mm
Grids supplied	2	2
Dehydrator	●	●
Thermostatic expansion valve	●	●
Heating resistor	●	●
Regulation	wire	wire

* With using the correct insulation, 1.2 "U" factor double glazing and the cellar being under the max. room volume.

** Cooling capacity will start to reduce as the ambient temperature reaches 40 deg. C and higher. Prolonged periods of high heat can prevent the cellar maintaining the ideal 15 deg. C

A STORY OF LOVE AND TERROIR...

It is in the foothills of the Alsatian vineyards, where the wine route starts, that the WineMaster® story begins. Our attachment to terroir and our love of wine have always been the source of our thought process and creativity.

Ever since its inception in 1984, the skills and know-how of the men and women of WineMaster® have been at the heart of every step in the air conditioner making process.

Quality and detail are what motivate us, and we are proud of our products and their 100 % Alsatian design.

“ INNOVATION AND EXCELLENCE ARE WINEMASTER'S KEY VALUES. ”



WINEMASTER
— le temps d'être différent

Z.I. VIEUX-THANN ■ 18 RUE GUY DE PLACE
BP 60010 ■ F68801 THANN CEDEX
Tél : +33 (0) 389 377 515 ■ E-mail : contact@winemaster.fr
www.winemaster.fr